




CBS PARTS LTD.

HEAVY DUTY TRUCK & TRAILER PARTS

The Right Parts... On Time... At The Right Price

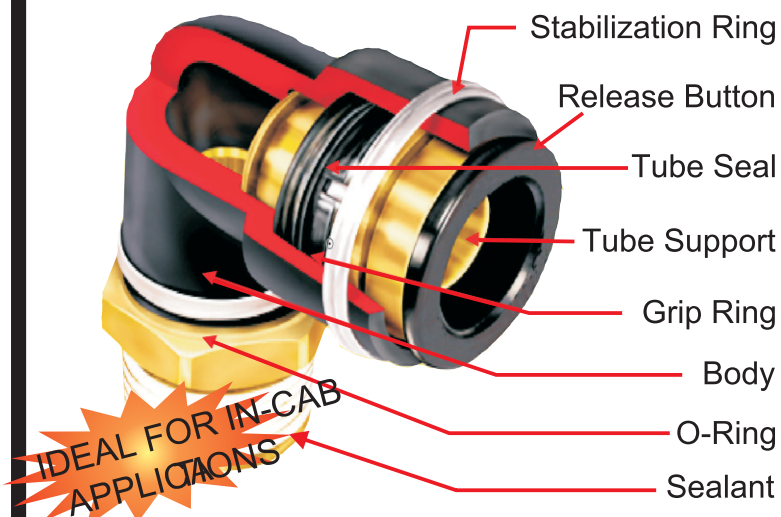

PUSH-TO-CONNECT COMPOSITE FITTINGS

SEE REVERSE FOR OUR
SELECTION OF
IN-STOCK QWIK-FIT™
FITTINGS

OTHER SIZES ARE
AVAILABLE ON REQUEST

Tube Seal

Low temperature seal goes beyond the standard O-ring seal offered by competitors

Grip Ring

Smooth scratch-proof tube entry and high gripping force

Body

Composite body offers:

- 1) Weight saving
- 2) Compact dimensions
- 3) High performance
- 4) Superior chemical resistance

O-Ring

Allows rotation, optimum positioning and high burst pressure

Stabilization Ring

Stainless steel ring offers maximum durability

Release Button

Large release button contracts the gripping ring when pushed in. This design has 2 benefits:

- 1) Gripping fingers do not scratch the tube during installation or removal
- 2) Lower insertion & release forces

Sealant

Pre-applied thread sealant allows for quicker installation time

Tube support

A fixed tube support promotes easier tube insertion, superior side load performance & increased tube retention

12-90003

Economy pocket cutter



QWIK-FIT™



Abbotsford (604) 859-6731 / Burnaby (604) 299-0681 / Kamloops (250) 314-1000
Prince George (250) 563-9330 / Surrey (604) 888-1944

www.cbsparts.ca

	Part Number	Tube Size	Pipe Size
 Bulkhead Union	12-90044	1/4"	-
	12-90066	3/8"	-
	12-90088	1/2"	-
 Union Elbow	12-91066	3/8"	-
	12-91088	1/2"	-
 Male Connector	12-93042	1/4"	1/8"
	12-93044	1/4"	1/4"
	12-93064	3/8"	1/4"
	12-93066	3/8"	3/8"
	12-93086	1/2"	3/8"
 Straight Union	12-95022*	1/8"	-
	12-95044	1/4"	-
	12-95055*	5/32"	-
	12-95066	3/8"	-
	12-95088	1/2"	-
 Male Elbow (Swivel)**	12-94042	1/4"	1/8"
	12-94044	1/4"	1/4"
	12-94064	3/8"	1/4"
	12-94066	3/8"	3/8"
	12-94086	1/2"	3/8"
 Union Tee	12-96444	1/4"	-
	12-96666	3/8"	-
	12-96888	1/2"	-
 45° Male Elbow (Swivel)**	12-98044	1/4"	1/4"
	12-98064	3/8"	1/4"
	12-98066	3/8"	3/8"
	12-98086	1/2"	3/8"
	12-98088	1/2"	1/2"
	12-98106	5/8"	3/8"

* Does not meet DOT or SAE specifications for air brake applications

** Swivel to final position only. Not designed for constant rotation.