
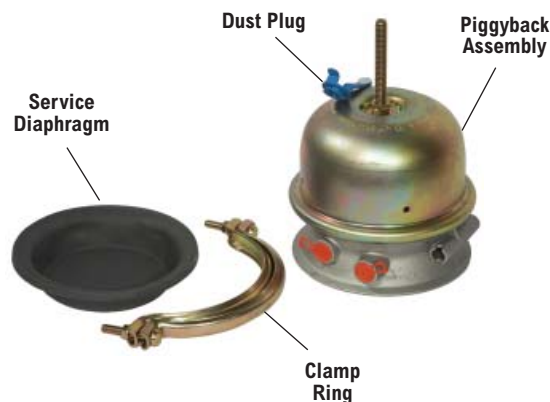


Spring Brakes

V.M.R.S. 13-010-025

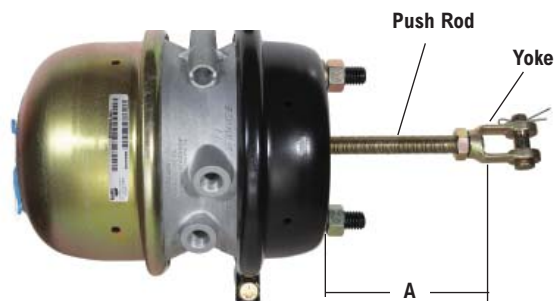

Type	Stroke	A Push Rod Length ¹	Spring Brake Service New Pc. No.		Piggyback Kit ³	Piggyback	Rubber Service Diaphragm ⁴	Clamp Band	Dust Plug ⁵	Service Return Spring
			w/Out Yoke	w/Yoke ²						
20/24	2.25"	8.20"	800828	5007129	K027229	5007123	802488	800908	K034202	800919
24/24	2.50"	8.00"	800829	5007130	K027230	5007124	802489	800909		
		9.75"	K026559	-						
24/30	2.50"	8.00"	800830	5007131	K027231	5007125				
		9.75"	K026561	-						
24/30 ELS	3.00"	7.80"	5010434	5010402	5011593	801376N	801378			
30/30	2.50"	5.62"	NT3030STD-56	NT3030STD-56TC	NT3030STD- KIT	NT3030STD- PIG	K037502	800910	K057632	
		7.80"	NT3030STD-78	NT3030STD-78TC						
		9.75"	K049898	-						
		12.00"	NT3030STD-120	NT3030STD-120TC						
		2.25" Welded Clevis	-	NT3030STD-WC						
30/30 ELS	3.00"	8.00"	K022884	K022883	5011594	801377N	801379	800910	K034202	
		9.75"	802541	-						
30/36	2.50"	7.80"	800832	5007133	K024654	5007127	802490	800910	802067	800919
36/36 ELS	3.00"	8.50"	800833	5007134N	K027243	5007128	802491	800911	802067	800920

¹ Push rod length measured in the fully retracted, zero stroke position.

² Yoke piece number 228790N is included. See yoke information below.

³ Piggyback kit includes: Piggyback assembly, clamp bands with hardware, and a rubber service diaphragm.


⁴ Service diaphragm piece number 802490 should be used when servicing earlier Bendix 30/30 spring brake assemblies with a 2.50" stroke.

⁵ Dust plug piece number K034202 should be used if servicing earlier Bendix 30/30 spring brake assemblies with a 2.50" stroke.

Yoke Assemblies

For Brake Chambers
& Rotochambers

V.M.R.S. 13-004-018

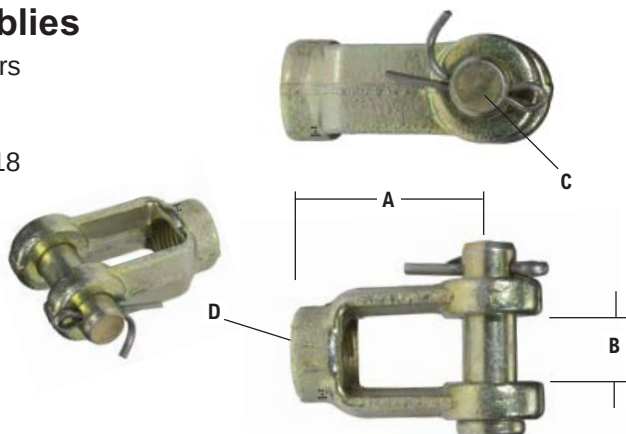


Yoke Assembly Pc. No.	A End to Pin	B Slot Width	C Pin Dia.	D Thread Size
205948N	1-3/4"	9/16"	1/2"	1/2-20
228790N	1-3/4"	9/16"	1/2"	5/8-18
228798N	1-3/4"	9/16"	5/8"	5/8-18
229496N	1-7/8"	13/16"	3/4"	5/8-18
282592N	2"	13/16"	3/4"	3/4-16

Brake Chambers

Fully Threaded Push Rod

V.M.R.S. 13-010-034

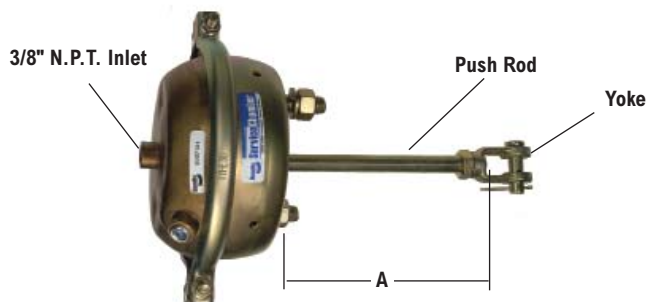

Brake Chamber Type	Stroke	Service New Pc. No. w/Out Yoke	A Push Rod Length	Service New Pc. No. w/Yoke	A Push Rod Length	Rubber Diaphragm	Clamp Band	Spring
12	1.75"	800822	8.60"	5007117N	8.60"	802486	800906	800918
16	2.25"	800823	8.60"	5007118N	8.60"	802487	800907	
20	2.50"	802990	8.20"	800824	8.20"	802488	800908	800919
24	2.50"	802986	8.00"	800825	7.80"	802489	800909	
30	2.50"	800826	7.60"	5007121N	8.60"	802490	800910	
36 ELS	3.00"	800827	8.40"	5007122N	8.40"	802491	800911	800920



Diaphragm




Spring

Rotochambers

V.M.R.S. 13-010-034

Fully Threaded Push Rod

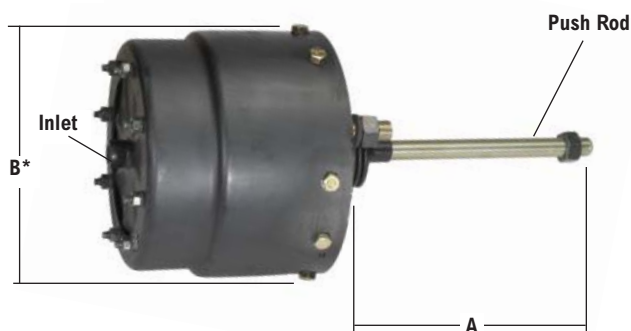

Spring



Diaphragm

Type	Service New Pc. No.	Port Size (NPT)	A Push Rod Length	Push Rod Thread	B Diameter*	Diaphragm Material and Size			Spring
						Rubber	Neoprene	C Diameter	
9	229814	1/4"-18	13"	1/2"-20	4-3/4"	231472	236524	4-5/16"	231481
12	229815	3/8"-18	11"	1/2"-20	5-9/32"	231506	236525	4-27/32"	231513
16	229816	3/8"-18	7-7/8"	1/2"-20	5-7/8"	231525	236526	5-7/16"	231531
20	229817	3/8"-18	6-7/8"	1/2"-20	6-13/32"	231982	236527	5-31/32"	231933
24	229818	1/4"-18	5-13/16"	1/2"-20	6-15/16"	231516	236528	6-7/16"	231522
30	229819	1/4"-18	9-1/16"	5/8"-18	7-17/32"	231543	236529	7-3/32"	231549
36	229820	1/4"-18	8-1/16"	5/8"-18	8-5/32"	231534	236530	7-21/32"	231540
50	229821	3/8"-18	10-15/16"	3/4"-16	9-13/32"	231491	236531	8-29/32"	231498

* Diameter "B" measurement includes the bolt heads.