



Bendix® Versajust™ Slack Adjusters
Optimum Performance. Optimum Engineering.

We're readjusting the
slack adjuster market.



Maintains
Optimum
Brake
Performance.

The Bendix® Versajust™ Slack Adjuster is designed for use on S-Cam brakes – the most common type used on commercial vehicles.

Built to last, the new Versajust slack is compatible with nearly any automatic slack adjuster or link-style ASA. What's more, the Versajust slack is cross-compatible (across each axle) with the Bendix® ASA-5® slack adjuster.

For generations, the Bendix name has been synonymous with the best in proven performance, customer service and support, and the Bendix Versajust slack is no exception. It features advanced sealing technology and a unique external wrap spring one-way clutch which provides gradual adjustment to help prevent hot brake over-adjustment, as well as a minimized stable stroke value to optimize brake efficiency.

The Bendix Versajust automatic slack...easy to install and simple to maintain. It makes installation templates a thing of the past and maintenance hassle-free. Plus, it's backed by a 6-year/1 million mile line-haul warranty, one of the industry's best.

Versatility. Durability. Performance. Savings. It's time for a change. It's time for the Bendix Versajust Slack Adjuster. Find out more today.



Bendix® brand foundation brake
products are brought to you by:

**Bendix Spicer
Foundation Brake LLC**
A Bendix CVS and Dana Joint Venture

Built to last. Sealed from contaminants

- Prolongs product life; reduces downtime and maintenance costs

Precise adjustment principles ensure proper adjustment across all applications

- Extends brake lining life and helps maintain brake balance
- Less sensitive to varying temperatures and duty-cycles
- Maximizes the efficiency of the brake system
- Fewer parts to stock

Easy to install, use & maintain

- Unhanded
- No installation template required
- No external brackets required
- Interchangeable with welded & universal (1.3" pin-to-pin) clevises


Stay with the best. Stay with Bendix®.

The Bendix® Versajust™ Slack Adjuster (with corresponding clevis) can be installed as a direct replacement for the equivalent Bendix® ASA-5® model.

When replacing a Bendix ASA-5 slack with a Versajust model:

- Replacement of an ASA-5 on one side of the vehicle axle, no longer requires replacement of the ASA-5 on the other side of the axle. The Versajust and ASA-5 slacks are cross-compatible on the axle.
- All other installation instructions and considerations remain the same as that of the Bendix ASA-5 model.

Bendix ASA-5 Slack Adjuster Part Number	Bendix Versajust Kit Part Number	Spline	Arm
065170	K041870	1.5 – 10C	5.5"
065700	K041870	1.5 – 10C	5.5"
065174	K043197	1.5 – 28	5.5"
065247	K043197	1.5 – 28	5.5"
065172	K041876	1.5 – 10C	6.0"
065344	K041876	1.5 – 10C	6.0"
065175	K041877	1.5 – 28	6.0"
065176	K041877	1.5 – 28	6.0"

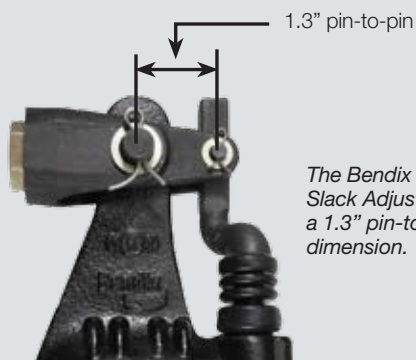

The Bendix Versajust Slack Adjuster features a 1.3" pin-to-pin clevis dimension.

Designed for universal fit, the Bendix® Versajust™ Slack Adjuster can replace just about any other slack adjuster*

Bendix® Versajust™**	Euclid®	Meritor®	
K041870	E-11398	R801041	
K041876	E-11399	R801042	
K043197	E-11400	R801072	
K043197	E-11401	R801073	
K041877	E-11402	R801074	
K043197	E-11404	R801079	
K041870	E-11409	R802316	
K041870	E-11410	R802317	
K041870	E-11411	R802332	
K041870	E-11412	R802333	
K043197	E-11415	R802444	
K043197	E-11416	R802445	
K043197	E-11417	R802446	
K043197	E-11418	R802447	
K041877	E-11421	R802486	
K041877	E-11422	R802487	
K041877	E-11423	R802490	
K041877	E-11424	R802491	
Bendix® Versajust™**	Haldex® AA-1	Haldex® SABA	
K041876	40010306	—	
K041877	40010305	—	
K041877	40010212	40020212	
K041870	40010215	40020215	
K043197	40010211	40020211	
K041876	40010216	40020216	
K043197	40010141	—	
K043197	40010070	—	
K041877	40010144	—	
K041870	40010143	—	
K041877	40010140	—	
K041870	40010155	—	
K041876	40010142	—	
Bendix® Versajust™**	Gunite® with 1.02" pin center distance clevis	Gunite® 2000	Gunite® w/o clevis
K041870	AS1132	AS1168	AS1032
K041876	AS1133	AS1169	AS1033
K041877	AS1141	AS1173	AS1041
K043197	AS1140	AS1172	AS1040
Bendix® Versajust™**	Stemco-Crewson® non Auto Check™	Stemco-Crewson® Auto Check™	
K041870	MK21102S	MK41100S	
K041876	MK21106S	MK41106S	
K041877	MK22106S	MK42106S	
K041870	MK21100S	—	
K043197	MK22100S	MK42100S	
K041876	MK21103S	—	

* The above detail is provided for reference only. All parts listed should be verified before use for each individual brake system application or vehicle.

** All Bendix Versajust Slack Adjuster part numbers listed include a 1.3" pin-to-pin clevis dimension.

The Bendix® Versajust™ Advantage



Versajust automatic slack adjusters from Bendix – the commercial vehicle brake experts – are designed to optimize foundation brake performance, reduce downtime, and help lower fleet costs.

Find out why Bendix is the single source for all the solutions you need. Talk to your Bendix account manager, today. Call 1-866-610-9709, or visit www.foundationbrakes.com.



Bendix Spicer
Foundation Brake LLC
A Bendix CVS and Dana Joint Venture

901 Cleveland Street • Elyria, Ohio 44035 • 1-866-610-9709 • www.foundationbrakes.com
BW7498 ©2011 Bendix Spicer Foundation Brake LLC • 3/11 • All Rights Reserved



Printed on recycled paper


ASA-5® Automatic Slack Adjuster

V.M.R.S. 013-001-030 (FRONT)
013-002-028 (REAR)

ASA-5® Automatic Slack Adjuster Maintenance Kits

Kit Pc. No.	Description
107162	1/2" Adapter Kit - Quick Connect
107161N	5/8" Adapter Kit - Quick Connect
107157	Quick Connect Yoke Kit (Straight)
107159	Quick Connect Yoke Kit (Offset)
107158	Easy-On Yoke Kit (Straight)
107160	Easy-On Yoke Kit (Offset)


Kit contents at the end of this catalog section.

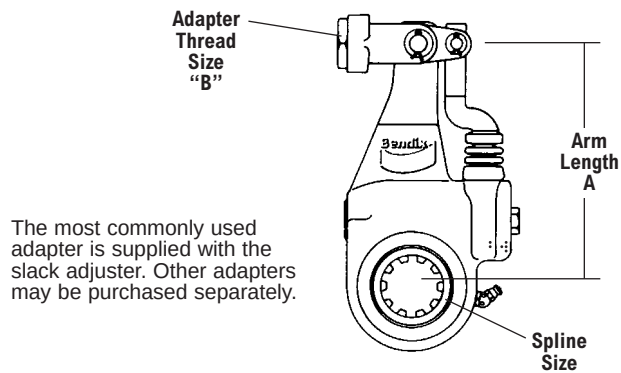

The most commonly used adapter is supplied with the slack adjuster. Other adapters may be purchased separately.




ASA-5®
Automatic
Slack
Adjuster
Exterior

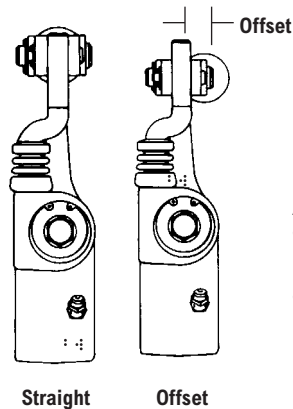


All offset slack adjusters are provided as shown. If the opposite offset is needed remove the yoke and rotate 180°.

Standard Adapter

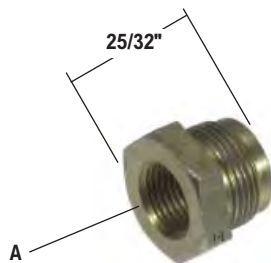

Service New Pc. No.	A Push Rod Thread Size
291452N	5/8"-18 UNF
292756N	1/2"-20 UNF

Extended Adapter

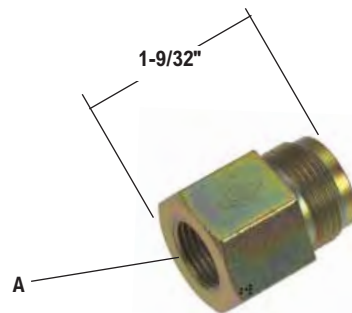

Service New Pc. No.	A Push Rod Thread Size
297700N	5/8"-18 UNF
297701N	1/2"-20 UNF

ASA-5® Slack Adjuster Service Assy. Pc. No.	Arm Length A	Adapter Thread Size B	Yoke Offset	Service Parts/Kits	
				Adapter	Yoke
1 1/4"-10C Spline					
065162	5"	1/2"-20	5/8"	292756N	107160
065163	5-1/2"	5/8"-18	5/8"	291452N	107160
065244	5-1/2"	1/2"-20	5/8"	292756N	107160
065164	5-1/2"	1/2"-20	Straight	292756N	107158
801351	5-1/2"	5/8"-18	Straight	291452N	107158
801359	5"	5/8"-18	5/8"	291452N	107160
1 1/4"-24 Spline					
065166	5"	1/2"-20	5/8"	292756N	107160
065167	5-1/2"	5/8"-18	Straight	291452N	107158
065274	5-1/2"	1/2"-20	Straight	292756N	107158
1 1/2"-10C Spline					
065168	5"	1/2"-20	Straight	292756N	107158
065169	5-1/2"	1/2"-20	5/8"	292756N	107160
065170	5-1/2"	5/8"-18	Straight	291452N	107158
065172	6"	5/8"-18	Straight	291452N	107158
801352	5"	5/8"-18	Straight	291452N	107158
801358	5-1/2"	5/8"-18	5/8"	291452N	107160
1 1/2"-28 Spline					
065173	5"	1/2"-20	Straight	292756N	107158
065174	5-1/2"	5/8"-18	Straight	291452N	107158
065176	6"	5/8"-18	Straight	291452N	107158
801354	5"	5/8"-18	Straight	291452N	107158
801355	5-1/2"	1/2"-20	Straight	292756N	107158
801356	6"	1/2"-20	Straight	292756N	107158
1 5/8"-37 Spline					
065177	6"	5/8"-18	Straight	291452N	107158
065178	5-1/2"	5/8"-18	Straight	291452N	107158

The easy-on-yoke assemblies are standard on the ASA-5® service basic slack adjusters, however, early production assemblies may contain the quick connect yoke.

If the quick connect yoke is required it must be purchased separately and installed by the customer.

All ASA-5® slack adjusters are supplied with a 45° lube fitting unless otherwise noted.



5/8" Adapter Kit - Quick Connect Pc. No. 107161N



1/2" Adapter Kit - Quick Connect Pc. No. 107162



Quick Connect Yoke Kit (Offset) - Pc. No. 107159



Easy-On Yoke Kit (Offset) - Pc. No. 107160



Quick Connect Yoke Kit (Straight) - Pc. No. 107157



Easy-On Yoke Kit (Straight) - Pc. No. 107158